

VFK SERIES

FAN FORCED WALL HEATERS

- HIGH CAPACITY - UP TO 4800 WATTS
- THREE PIECE DESIGN
- SLIM SURFACE OR RECESSED MOUNTING
- EASY TO INSTALL AND SERVICE
- NORTHERN WHITE LOUVERED COVER
- TWO-POLE THERMOSTAT
- BUILT-IN THERMAL CUTOUT, FAN DELAY



APPLICATIONS


Berko's high-capacity, heavy duty fan forced wall heaters are designed for use almost anywhere in residential, commercial or industrial areas requiring electric fan forced heaters in 1500 to 4800 watt capacities. They perform exceptionally well in such applications as motels, entryways, playrooms, basements, workshops, garages, stores and similar large areas.

MOUNTING LIMITATIONS

1. For wall mounting - Do not install back box closer than 8 inches from floor or adjacent wall.
2. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

Thermostat range	40° to 90°F
Air movement	100 CFM

FILE # E21609

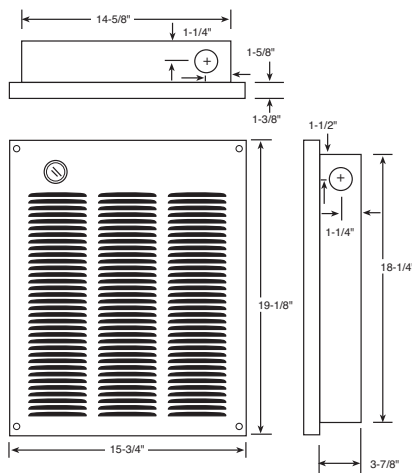

SELECTION CHART

CATALOG NO.	VOLTS*	WATTS	BTU/HR.	AMPS
VFK151	120	1500	5120	12.5
VFK204	240/208	2000/1500	6,826/5,120	8.3/7.2
VFK304	240	3000	10,239	12.5
VFK404	240/208	4000/3000	13,652/10,239	16.7/14.4
VFK484	240/208	4800/3600	16,382/12,287	20.0/17.3

*Single Phase, 60 Hz. A.C.

ACCESSORIES

CATALOG NO.	DESCRIPTION
VFKSM	Surface Mounting Frame.
VFKS-1	1" Semi-Recessed Frame.
VFKS-2	2" Semi-Recessed Frame.
VFK-SFK	14 Gauge Security Front Cover.