Controls

CLLC Capacitive Liquid Level Control




- Senses Liquid Level Without Direct Contact with Solution
- Senses Through Non-Metallic Tank Walls Up to 3/4" Thickness
- Normally-Open and Normally-Closed Models
- 90-250 Volt
- Straight, 90° and Remote Mounting Styles


Description

The CLLC senses liquid level from the outside of plastic or nonmetallic tanks using capacitance. It can sense through tank walls up to 3/4" thickness.

Application



Dimensions

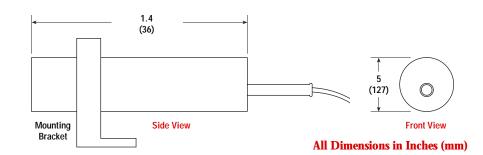

Ordering Information

Model	PCN	Volts ¹	Switching	Style	Stock
CLLC-1S	360268	90-250	Normally Open	Straight	S
CLLC-1N	360276	90-250	Normally Open	90 Degree	S
CLLC-1R	360284	90-250	Normally Open	Remote	S
CLLC-2S	360292	90-250	Normally Closed	Straight	S
CLLC-2N	360305	90-250	Normally Closed	90 Degree	S
CLLC-2R	360313	90-250	Normally Closed	Remote	S
Stock Status: S = stock AS = assembly stock NS - non-stock Note — 1. Mounting bracket included.					



