


SQDM



Subminiature Quick Disconnect Molded Thermocouple Probes

- 6 and 12" Lengths in Stock
- Sheath Diameters from 0.010 to 0.125"
- 304 SS or INCONEL® Sheaths
- Grounded, Ungrounded or Exposed Junction
- Color-Coded SMP Subminiature Connector Termination
- Mating Connector and Cable Clamp Included
- Custom Lengths Available
- Available with PFA Teflon® Coating



In Stock:

Model	PCN
JMQSS-062G-6/C	327185
JMQSS-062U-6/C	327193
JMQSS-125G-6/C	327206
JMQSS-125U-6/C	327214
KMQSS-062G-6/C	327222
KMQSS-062U-6/C	327230
KMQSS-125G-6/C	327249
KMQSS-125U-6/C	327257

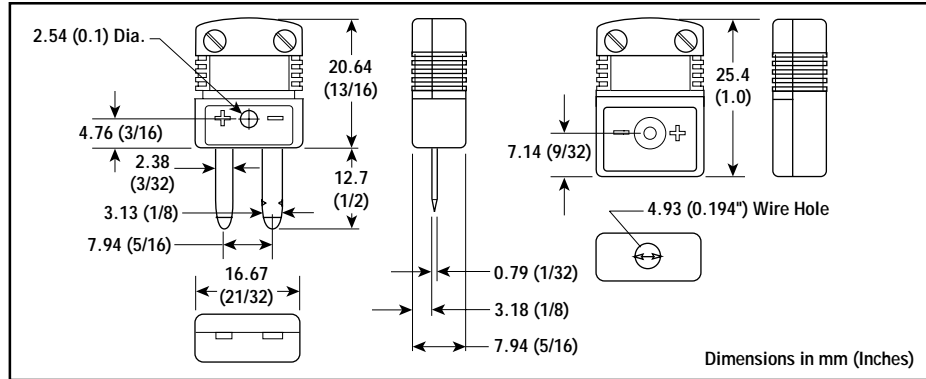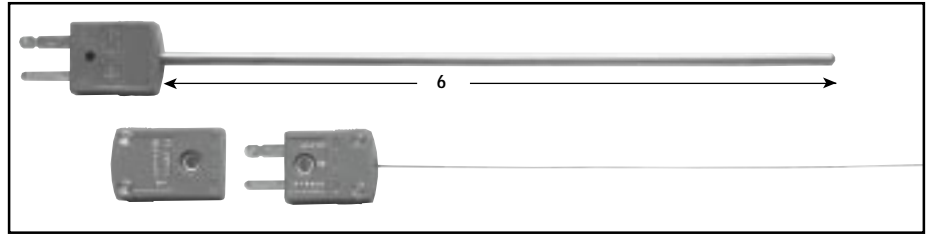

Dimensions in mm (Inches)
U.S. and International Patents

Specifications and Ordering Information

Thermocouple Alloy	Sheath Dia. (In.)	Model	
		6" Length	12" Length
Iron-Constantan 304 SS Sheath	0.010	JMQSS-010 ⁽¹⁾ -6/C	JMQSS-010 ⁽¹⁾ -12/C
	0.020	JMQSS-020 ⁽¹⁾ -6/C	JMQSS-020 ⁽¹⁾ -12/C
	0.032	JMQSS-032 ⁽¹⁾ -6/C	JMQSS-032 ⁽¹⁾ -12/C
	0.040	JMQSS-040 ⁽¹⁾ -6/C	JMQSS-040 ⁽¹⁾ -12/C
	0.062	JMQSS-062 ⁽¹⁾ -6/C	JMQSS-062 ⁽¹⁾ -12/C
	0.125	JMQSS-125 ⁽¹⁾ -6/C	JMQSS-125 ⁽¹⁾ -12/C
Chromel-Alumel 304 SS Sheath	0.010	KMQSS-010 ⁽¹⁾ -6/C	KMQSS-010 ⁽¹⁾ -12/C
	0.020	KMQSS-020 ⁽¹⁾ -6/C	KMQSS-020 ⁽¹⁾ -12/C
	0.032	KMQSS-032 ⁽¹⁾ -6/C	KMQSS-032 ⁽¹⁾ -12/C
	0.040	KMQSS-040 ⁽¹⁾ -6/C	KMQSS-040 ⁽¹⁾ -12/C
	0.062	KMQSS-062 ⁽¹⁾ -6/C	KMQSS-062 ⁽¹⁾ -12/C
	0.125	KMQSS-125 ⁽¹⁾ -6/C	KMQSS-125 ⁽¹⁾ -12/C
Chromel-Constantan 304 SS Sheath	0.010	EMQSS-010 ⁽¹⁾ -6/C	EMQSS-010 ⁽¹⁾ -12/C
	0.020	EMQSS-020 ⁽¹⁾ -6/C	EMQSS-020 ⁽¹⁾ -12/C
	0.032	EMQSS-032 ⁽¹⁾ -6/C	EMQSS-032 ⁽¹⁾ -12/C
	0.040	EMQSS-040 ⁽¹⁾ -6/C	EMQSS-040 ⁽¹⁾ -12/C
	0.062	EMQSS-062 ⁽¹⁾ -6/C	EMQSS-062 ⁽¹⁾ -12/C
	0.125	EMQSS-125 ⁽¹⁾ -6/C	EMQSS-125 ⁽¹⁾ -12/C
Copper-Constantan 304 SS Sheath	0.020	TMQSS-020 ⁽¹⁾ -6/C	TMQSS-020 ⁽¹⁾ -12/C
	0.032	TMQSS-032 ⁽¹⁾ -6/C	TMQSS-032 ⁽¹⁾ -12/C
	0.040	TMQSS-040 ⁽¹⁾ -6/C	TMQSS-040 ⁽¹⁾ -12/C
	0.062	TMQSS-062 ⁽¹⁾ -6/C	TMQSS-062 ⁽¹⁾ -12/C
	0.125	TMQSS-125 ⁽¹⁾ -6/C	TMQSS-125 ⁽¹⁾ -12/C
	Nicrosil-Nisil INCONEL® 600 Sheath	0.010	NMQIN-010 ⁽¹⁾ -6/C
0.020		NMQIN-020 ⁽¹⁾ -6/C	NMQIN-020 ⁽¹⁾ -12/C
0.032		NMQIN-032 ⁽¹⁾ -6/C	NMQIN-032 ⁽¹⁾ -12/C
0.040		NMQIN-040 ⁽¹⁾ -6/C	NMQIN-040 ⁽¹⁾ -12/C
0.062		NMQIN-062 ⁽¹⁾ -6/C	NMQIN-062 ⁽¹⁾ -12/C
0.125		NMQIN-125 ⁽¹⁾ -6/C	NMQIN-125 ⁽¹⁾ -12/C

1. Specify junction type: E (Exposed), G (Grounded) or U (Ungrounded). To order with INCONEL® sheath, change "SS" in model to "IN". Probes with 0.040" diameter and up are supplied with the connector molded to probe. Smaller sized probes are supplied with removable connector. All type N probes are supplied with removable connector.

Teflon® is a registered trademark of DuPont.