Immersion

ARMT-3


Clean Water Applications







- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 53 W/In2)
- 3 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt,
 1 and 3 Phase
- General Purpose Terminal Enclosure

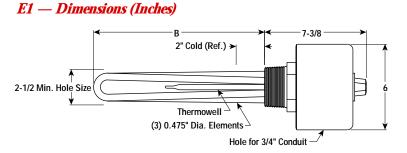



Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW		Phase Purpos	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
3 3 3 3 3 3 3	120 208 208 240 240 480 480	1 1 3 1 3 1 3	51 51 51 51 51 51 51	3 3 3 3 3 3 3	7-3/8 7-3/8 7-3/8 7-3/8 7-3/8 7-3/8 7-3/8	6 6 6 6 6 6	ARMT-3305T2 ARMT-3305T2 ARMT-3305T2 ARMT-3305T2 ARMT-3305T2 ARMT-3305T2 ARMT-3305T2	AS AS AS AS AS	190852 320733 320776 285819 274810 270297 270300	ARMT-3305T1 ARMT-3305T1 ARMT-3305T1 ARMT-3305T1 ARMT-3305T1 ARMT-3305T1	AS AS AS AS AS	310957 320741 320784 285800 285843 310981 310990
3.75 3.75 3.75 3.75 3.75 3.75 3.75	120 208 208 240 240 480 480	1 1 3 1 3 1 3	52 52 52 52 52 52 52 52	33333333	8-7/8 8-7/8 8-7/8 8-7/8 8-7/8 8-7/8 8-7/8	6 6 6 6 6 6	ARMT-3375T2 ARMT-3375T2 ARMT-3375T2 ARMT-3375T2 ARMT-3375T2 ARMT-3375T2 ARMT-3375T2	AS AS AS AS AS AS	190895 320813 320856 285886 285923 270350 274829	ARMT-3375T1 ARMT-3375T1 ARMT-3375T1 ARMT-3375T1 ARMT-3375T1 ARMT-3375T1 ARMT-3375T1	AS AS AS AS AS AS	311044 320821 320864 285878 285915 311052 311060
4.5 4.5 4.5 4.5 4.5 4.5 4.5	120 208 208 240 240 480 480	1 1 3 1 3 1 3	48 48 48 48 48 48	3333333	11-3/8 11-3/8 11-3/8 11-3/8 11-3/8 11-3/8	7 7 7 7 7 7	ARMT-3455T2 ARMT-3455T2 ARMT-3455T2 ARMT-3455T2 ARMT-3455T2 ARMT-3455T2 ARMT-3455T2	AS AS AS AS AS	270377 320899 320936 285966 274837 286037 274845	ARMT-3455T1 ARMT-3455T1 ARMT-3455T1 ARMT-3455T1 ARMT-3455T1 ARMT-3455T1	AS AS AS AS AS	311132 320901 320944 285958 285990 286029 286061
6 6 6 6 6 6	120 208 208 240 240 480 480	1 1 3 1 3 1 3	48 48 48 48 48 48	33333333	17-3/8 17-3/8 17-3/8 17-3/8 17-3/8 17-3/8 17-3/8	8 8 8 8 8	ARMT-3605T2 ARMT-3605T2 ARMT-3605T2 ARMT-3605T2 ARMT-3605T2 ARMT-3605T2	AS AS AS AS AS AS	270430 320979 321015 286109 274853 286176 286213	ARMT-3605T1 ARMT-3605T1 ARMT-3605T1 ARMT-3605T1 ARMT-3605T1 ARMT-3605T1 ARMT-3605T1	AS AS AS AS AS AS	311167 320987 321023 286096 286133 286168 286205
7.5 7.5 7.5 7.5 7.5 7.5	208 208 240 240 480 480	1 3 1 3 1 3	53 53 53 53 53 53	3 3 3 3 3 3	19-1/8 19-1/8 19-1/8 19-1/8 19-1/8	8 8 8 8 8	ARMT-3755T2 ARMT-3755T2 ARMT-3755T2 ARMT-3755T2 ARMT-3755T2 ARMT-3755T2	AS AS AS AS AS	321058 321090 274861 286272 286310 286352	ARMT-3755T1 ARMT-3755T1 ARMT-3755T1 ARMT-3755T1 ARMT-3755T1 ARMT-3755T1	AS AS AS AS AS	321066 321103 286230 286264 286301 286344
999999	208 208 240 240 480 480	1 3 1 3 1 3	47 47 47 47 47 47	3 3 3 3 3 3	24-1/2 24-1/2 24-1/2 24-1/2 24-1/2 24-1/2	999999	ARMT-3905T2 ARMT-3905T2 ARMT-3905T2 ARMT-3905T2 ARMT-3905T2 ARMT-3905T2	AS AS AS AS S	321138 321170 286395 274870 286467 274888	ARMT-3905T1 ARMT-3905T1 ARMT-3905T1 ARMT-3905T1 ARMT-3905T1 ARMT-3905T1	AS AS AS AS AS	321146 321189 286387 286424 286459 285491

Chromalox®

Represented By: Ross & Pethtel Phone: 225-273-2202 Website

Immersion

ARMT-3


Clean Water Applications *(cont'd.)*







- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 53 W/In²)
- 3 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt,
 1 and 3 Phase
- General Purpose Terminal Enclosure

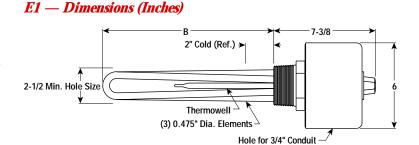



Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
12 12 12 12 12 12	208 208 240 240 480 480	1 3 1 3 1 3	46 46 46 46 46 46	3 3 3 3 3	32-5/16 32-5/16 32-5/16 32-5/16 32-5/16 32-5/16	13 13 13 13 13	ARMT-31205T2 ¹ ARMT-31205T2 ARMT-31205T2 ¹ ARMT-31205T2 ARMT-31205T2 ARMT-31205T2	AS AS AS AS AS	321218 321250 321293 321330 321373 321410	ARMT-31205T1 ¹ ARMT-31205T1 ARMT-31205T1 ¹ ARMT-31205T1 ARMT-31205T1 ARMT-31205T1	AS AS AS AS AS	321226 321269 321306 321349 321381 321429
15 15 15 15 15 15	208 208 240 240 480 480	1 3 1 3 1 3	46 46 46 46 46 46	3 3 3 3 3 3	39-3/4 39-3/4 39-3/4 39-3/4 39-3/4 39-3/4	14 14 14 14 14	ARMT-31505T2 ¹ ARMT-31505T2 ARMT-31505T2 ¹ ARMT-31505T2 ARMT-31505T2 ARMT-31505T2	AS AS AS AS AS	321453 321496 321533 321576 321613 321656	ARMT-31505T1 ¹ ARMT-31505T1 ARMT-31505T1 ¹ ARMT-31505T1 ARMT-31505T1 ARMT-31505T1	AS AS AS AS AS	321461 321509 321541 321584 321621 321664
18 18 18 18 18	208 240 240 480 480	3 1 3 1 3	46 46 46 46 46	3 3 3 3	47-1/4 47-1/4 47-1/4 47-1/4 47-1/4	15 15 15 15 15	ARMT-31805T2 ¹ ARMT-31805T2 ¹ ARMT-31805T2 ARMT-31805T2 ARMT-31805T2	AS AS AS AS	321699 321736 321779 321816 321859	ARMT-31805T1 ¹ ARMT-31805T1 ¹ ARMT-31805T1 ARMT-31805T1 ARMT-31805T1	AS AS AS AS	321701 321744 321787 321824 321867

Stock Status: S = stock AS = assembly stock NS = non-stock **To Order**—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).