

EMT-3


Clean Water Applications




Screw Plug

- 2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (61 - 67 W/In²)
- 3 - 12 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

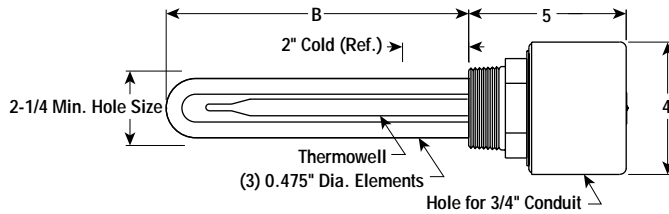

E2 — Dimensions (Inches)

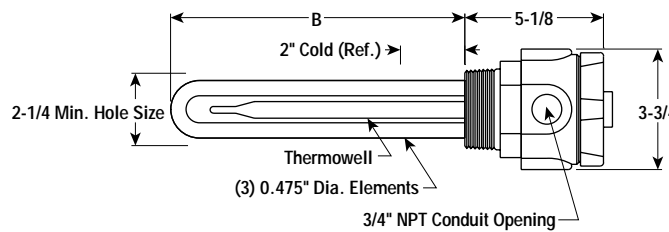

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
3	240	3	67	3	7	EMT-303	S	326220	5	EMT-303E2	AS	326300	8
3	480	3	67	3	7	EMT-303	S	326238	5	EMT-303E2	AS	326318	8
6	240	3	67	3	12	EMT-306	S	326246	6	EMT-306E2	AS	326326	9
6	480	3	67	3	12	EMT-306	S	326254	6	EMT-306E2	AS	326334	9
9	240	3	65	3	17-1/2	EMT-309	S	326262	7	EMT-309E2	AS	326342	10
9	480	3	65	3	17-1/2	EMT-309	S	326270	7	EMT-309E2	AS	326350	10
12	240	3	61	3	24	EMT-312	S	326289	8	EMT-312E2	AS	326369	11
12	480	3	61	3	24	EMT-312	S	326297	8	EMT-312E2	AS	326377	11

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.