


EMTI-3


Severely Corrosive Solution Applications

- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

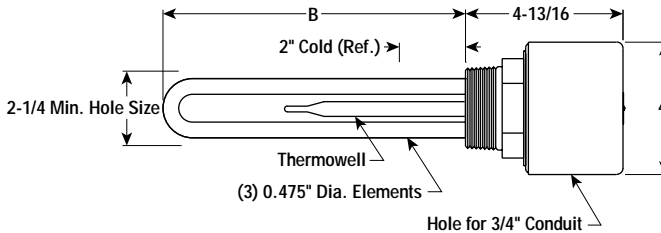

E2 — Dimensions (Inches)

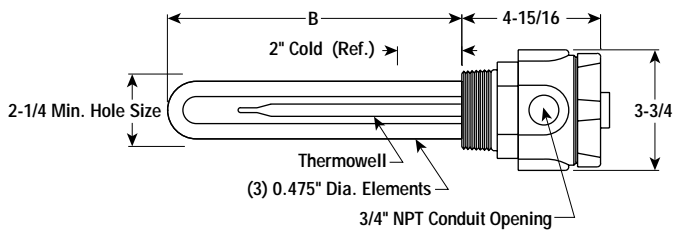

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
1	240	3	15	3	7-3/4	EMTI-301	AS	091440	5	EMTI-301E2	AS	033494	8
1	480	3	15	3	7-3/4	EMTI-301	AS	091459	5	EMTI-301E2	AS	033507	8
2	240	3	15	3	17-3/4	EMTI-302	AS	091467	6	EMTI-302E2	AS	033515	9
2	480	3	15	3	17-3/4	EMTI-302	AS	091475	6	EMTI-302E2	AS	033523	9
3	240	3	15	3	24-7/8	EMTI-303	AS	091483	7	EMTI-303E2	AS	033531	10
3	480	3	15	3	24-7/8	EMTI-303	AS	091491	7	EMTI-303E2	AS	033540	10
4	240	3	15	3	32-7/16	EMTI-304	AS	091504	9	EMTI-304E2	AS	033558	12
4	480	3	15	3	32-7/16	EMTI-304	AS	091512	9	EMTI-304E2	AS	033566	12
5	240	3	15	3	40-3/8	EMTI-305	AS	091520	10	EMTI-305E2	AS	033574	13
5	480	3	15	3	40-3/8	EMTI-305	AS	091539	10	EMTI-305E2	AS	033582	13
6	240	3	15	3	47-7/8	EMTI-306	AS	091547	12	EMTI-306E2	AS	033590	15
6	480	3	15	3	47-7/8	EMTI-306	AS	091555	12	EMTI-306E2	AS	033603	15

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.



Screw Plug