


EMTO-3

Light Weight Oil Applications




- 2" NPT Steel Screw Plug
- Steel Sheath Elements
- 23 W/in²
- 3 - 9 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

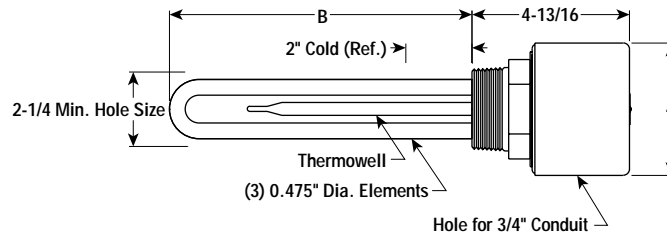

E2 — Dimensions (Inches)

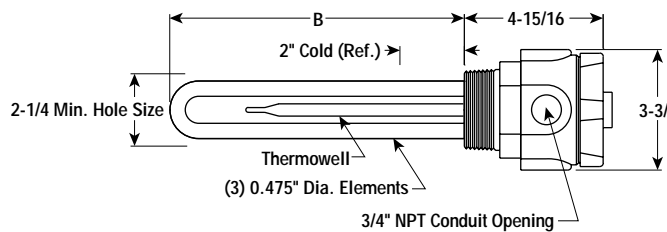

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
3	240	3	23	3	17-3/4	EMTO-330	AS	099266	6	EMTO-330E2	AS	034753	9
3	480	3	23	3	17-3/4	EMTO-330	AS	099274	6	EMTO-330E2	AS	034761	9
4.5	240	3	23	3	24-7/8	EMTO-345	AS	099282	7	EMTO-345E2	AS	034770	10
4.5	480	3	23	3	24-7/8	EMTO-345	AS	099290	7	EMTO-345E2	AS	034788	10
6	240	3	23	3	32-7/16	EMTO-360	AS	099303	9	EMTO-360E2	AS	034796	12
6	480	3	23	3	32-7/16	EMTO-360	AS	099311	9	EMTO-360E2	AS	034809	12
7.5	240	3	23	3	40-3/8	EMTO-375	AS	099320	10	EMTO-375E2	AS	034817	13
7.5	480	3	23	3	40-3/8	EMTO-375	AS	099338	10	EMTO-375E2	AS	034825	13
9	240	3	23	3	47-7/8	EMTO-390	AS	099346	12	EMTO-390E2	AS	034833	15
9	480	3	23	3	47-7/8	EMTO-390	AS	099354	12	EMTO-390E2	AS	034841	15

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Recognized and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.