


EMTO-3

Medium Weight Oil Applications




- 2" NPT Steel Screw Plug
- Steel Sheath Elements
- 15 W/In²
- 3 - 9 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

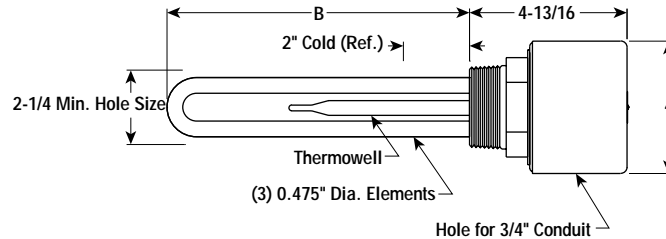

E2 — Dimensions (Inches)

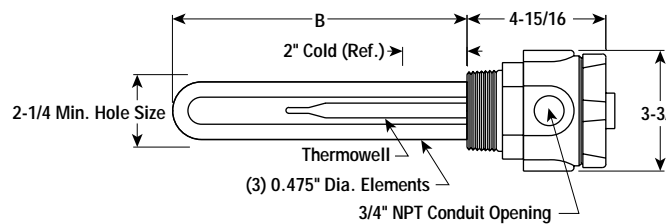

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
3	240	3	15	3	24-7/8	EMTO-3030	AS	099469	7	EMTO-3030E2	AS	035158	10
3	480	3	15	3	24-7/8	EMTO-3030	AS	099477	7	EMTO-3030E2	AS	035166	10
4	240	3	15	3	32-7/16	EMTO-3040	AS	099485	9	EMTO-3040E2	AS	035174	12
4	480	3	15	3	32-7/16	EMTO-3040	AS	099493	9	EMTO-3040E2	AS	035182	12
5	240	3	15	3	40-3/8	EMTO-3050	AS	099506	10	EMTO-3050E2	AS	035190	13
5	480	3	15	3	40-3/8	EMTO-3050	AS	099514	10	EMTO-3050E2	AS	035203	13
6	240	3	15	3	47-7/8	EMTO-3060	AS	099522	12	EMTO-3060E2	AS	035211	15
6	480	3	15	3	47-7/8	EMTO-3060	AS	099530	12	EMTO-3060E2	AS	035220	15
9	240	3	15	3	67-3/4	EMTO-3090	AS	099549	14	EMTO-3090E2	AS	035238	17
9	480	3	15	3	67-3/4	EMTO-3090	AS	099557	14	EMTO-3090E2	AS	035246	17

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Recognized and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.