


EMTS-3


Severely Corrosive Solution Applications

- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

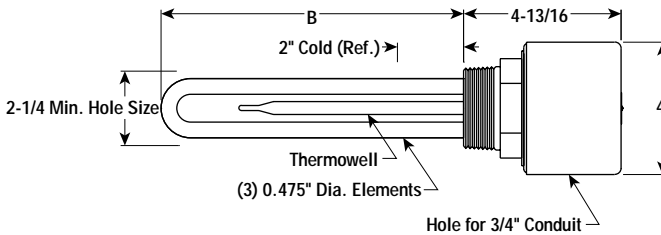

E2 — Dimensions (Inches)

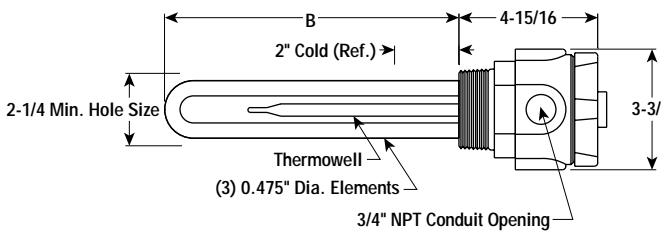

Screw Plug

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
1	240	3	15	3	7-3/4	EMTS-301	S	090472	5	EMTS-301E2	AS	033611	8
1	480	3	15	3	7-3/4	EMTS-301	S	090480	5	EMTS-301E2	AS	033620	8
2	240	3	15	3	17-3/4	EMTS-302	S	090499	6	EMTS-302E2	AS	033638	9
2	480	3	15	3	17-3/4	EMTS-302	S	090501	6	EMTS-302E2	AS	033646	9
3	240	3	15	3	24-7/8	EMTS-303	S	091248	7	EMTS-303E2	AS	033654	10
3	480	3	15	3	24-7/8	EMTS-303	S	091256	7	EMTS-303E2	AS	033662	10
4	240	3	15	3	32-7/16	EMTS-304	S	091264	9	EMTS-304E2	AS	033670	12
4	480	3	15	3	32-7/16	EMTS-304	S	091272	9	EMTS-304E2	AS	033689	12
5	240	3	15	3	40-3/8	EMTS-305	S	091280	10	EMTS-305E2	AS	033697	13
5	480	3	15	3	40-3/8	EMTS-305	S	091299	10	EMTS-305E2	AS	033700	13
6	240	3	15	3	47-7/8	EMTS-306	S	091301	12	EMTS-306E2	AS	033718	15
6	480	3	15	3	47-7/8	EMTS-306	S	091310	12	EMTS-306E2	AS	033726	15

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.