


## GRTF

### Side Mount Heat Exchangers Fluoropolymer Heating or Cooling Coils

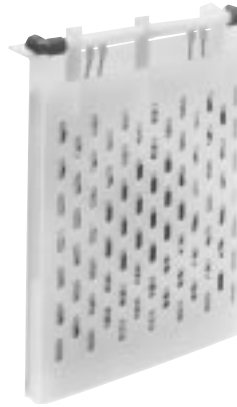


- Fluoropolymer Tube - 5/16" OD
- Surface Area (5 - 75 Ft<sup>2</sup>)

#### Features

- Polypropylene Guard, standard
- 25 psi Maximum Pressure
- Weights to Prevent Floating, standard
- Optional Surface Areas and Configurations available

#### Dimensions (Inches)

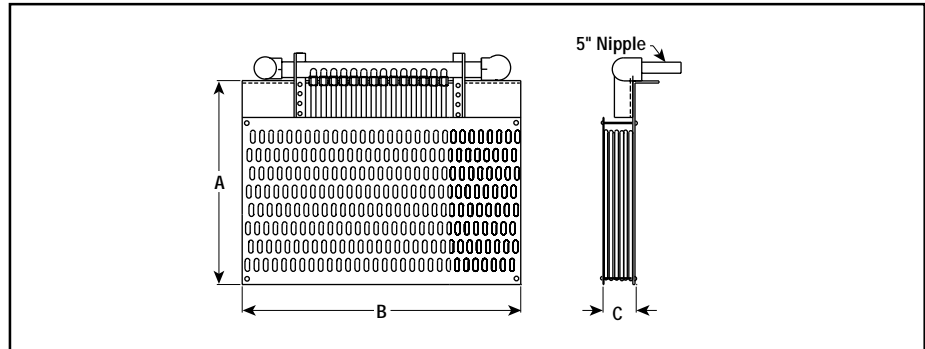

#### Specifications and Ordering Information

Surface Area (Ft <sup>2</sup> )	In/Out NPT	Dimensions (In.)			Fluoropolymer			Wt. (Lbs.)
		A	B	C	Model	Stock	PCN	
5	3/4	28	22	2	GRTF-52	NS	055618	12
10	3/4	28	22	3	GRTF-103	NS	055626	20
15	3/4	28	22	4	GRTF-154	NS	055634	28
10	3/4	36	30	2	GRTF-102	NS	055642	25
20	1	36	30	3	GRTF-203	NS	055650	42
30	1	36	30	4	GRTF-304	NS	055669	60
15	3/4	42	36	2	GRTF-152	NS	055677	35
30	1	42	36	3	GRTF-303	NS	055685	60
45	1-1/2	42	36	4	GRTF-454	NS	055693	80
20	1	47	41	2	GRTF-202	NS	055706	40
40	1-1/2	47	41	3	GRTF-403	NS	055714	80
60	1-1/2	47	41	4	GRTF-604	NS	055722	120
25	1	52	46	2	GRTF-252	NS	055730	50
50	1-1/2	52	46	3	GRTF-503	NS	055749	90
75	1-1/2	52	46	4	GRTF-754	NS	055757	130

**Stock Status:** S = stock AS = assembly stock NS = non-stock  
**To Order**—Specify model, PCN and quantity.

**Notes —**

- A. Heat transfer coefficient steam = 50 BTUH/FT<sup>2</sup>/°F.
- B. Heat transfer coefficient liquid = 40 BTUH/FT<sup>2</sup>/°F.