

GS & GT


Side Mount Metal Tube Heaters



- 316 Stainless Steel and Titanium Sheath Tubes
- 20 and 40 W/In²
- 1 - 12 kW
- 120, 240 and 480 Volt, Single Phase
- Moisture Resistant Terminal Enclosure



Dimensions (Inches)

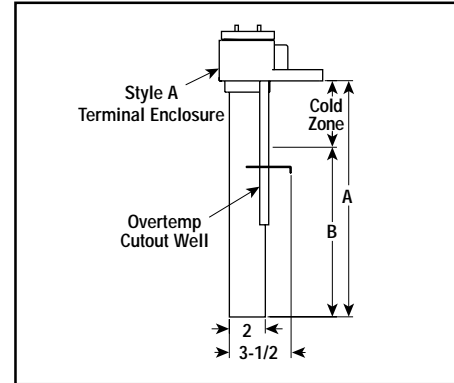

Features

- Moisture Resistant Terminal Enclosure
- Side Mounted Construction with Mounting Flange
- Overtemperature Protection one time use thermal fuse (260°F), field replaceable
- Steel, 304SS and Other Sheath Materials and Configurations available

Specifications and Ordering Information

kW	Volts	W/In ²	Phase ¹	Dimensions (In.)		316SS		Titanium		Stock	Wt. (Lbs.)
				A	B	Model	PCN	Model	PCN		
GS and GT — 40 W/In²											
1	120	40	1	11	6	GS-11	050016	GT-11	050331	S	6
1	240	40	1	11	6	GS-12	050024	GT-12	050340	S	6
2	240	40	1	17	10	GS-22	050032	GT-22	050358	S	9
2	480	40	1	17	10	GS-24	050040	GT-24	050366	S	9
3	240	40	1	23	16	GS-32	050059	GT-32	050374	S	11
3	480	40	1	23	16	GS-34	050067	GT-34	050382	S	11
4	240	40	1	29	20	GS-42	050075	GT-42	050390	S	13
4	480	40	1	29	20	GS-44	050083	GT-44	050403	S	13
5	240	40	1	35	25	GS-52	050091	GT-52	050411	S	16
5	480	40	1	35	25	GS-54	050104	GT-54	050420	S	16
6	240	40	1	40	30	GS-62	050112	GT-62	050438	S	18
6	480	40	1	40	30	GS-64	050120	GT-64	050446	S	18
8	240	40	1	47	37	GS-82	050139	GT-82	050454	NS	21
8	480	40	1	47	37	GS-84	050147	GT-84	050462	NS	21
9	240	40	1	54	44	GS-92	050155	GT-92	050470	NS	23
9	480	40	1	54	44	GS-94	050163	GT-94	050489	NS	23
10	240	40	1	59	49	GS-102	050171	GT-102	050497	NS	25
10	480	40	1	59	49	GS-104	050180	GT-104	050500	NS	25
12	240	40	1	68	58	GS-122	050198	GT-122	050518	NS	29
12	480	40	1	68	58	GS-124	050200	GT-124	050526	NS	29
GDS and GDT — 20 W/In²											
1	240	20	1	17	10	GDS-12	050219	GDT-12	050534	S	9
1	480	20	1	17	10	GDS-14	050227	GDT-14	050542	S	9
2	240	20	1	29	20	GDS-22	050235	GDT-22	050550	S	13
2	480	20	1	29	20	GDS-24	050243	GDT-24	050569	S	13
3	240	20	1	40	30	GDS-32	050251	GDT-32	050577	S	17
3	480	20	1	40	30	GDS-34	050260	GDT-34	050585	S	17
4	240	20	1	47	37	GDS-42	050278	GDT-42	050593	NS	21
4	480	20	1	47	37	GDS-44	050286	GDT-44	050606	NS	21
5	240	20	1	59	49	GDS-52	050294	GDT-52	050614	NS	25
5	480	20	1	59	49	GDS-54	050307	GDT-54	050622	NS	25
6	240	20	1	68	58	GDS-62	050315	GDT-62	050630	NS	29
6	480	20	1	68	58	GDS-64	050323	GDT-64	050649	NS	29

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, PCN, kW, volts, phase and quantity.