

2110 1/4 DIN Temperature Controller

- Easy Three-Step Setup
- High Current Output Option
 - 10 Amp Solid State Relay
 - 20 Amp Mechanical Relay
- Plug-In Output Cards
- J, K Thermocouple, or RTD Selectable Inputs, °F or °C Indication
- Alarm Relay Output Option
- NEMA 4X Front Panel
- Compact 1/4 DIN Design 4" Depth



Description

The Chromalox 2110 Temperature controller offers simple setup, flexibility and control features in an attractive, compact design that both OEMs and users will find cost effective. The 2110 is housed in a rugged, plastic 1/4 DIN package that only requires four inches behind the mounting surface. Straightforward operation and easy-to-use control features are major strengths of the 2110 controller.

Easy Three-Step Setup: The 2110 delivers exceptional process temperature control. Your process is up and running after three easy setup steps: 1) Select the sensor and control type, 2) Hook up the system and 3) Select the desired temperature.

Full Feature Outputs: A total of six output functions further extend the applications flexibility of the 2110 controller:

- 1 Amp Relay
- 20 Amp Relay
- Solid State Relay Drive
- 1 Amp Solid State Relay
- 5 Amp Solid State Relay
- 10 Amp Solid State Relay

The 2110 features a variety of output cards including High Current options of a 10 Amp Solid State Relay or 20 Amp Mechanical Relay. These outputs can directly control many cartridge or strip heaters, eliminating the need for a remote contactor or solid state relay. For larger three-phase loads, the 2110 can drive a remote device with the Pilot Duty Relay or Solid State Relay Drive outputs.



The optional Alarm Output gives you a non-latching, normally de-energized, 5 Amp relay output for over or under temperature protection of critical process temperatures.

Packaging with the User in Mind: The 2110 features a NEMA 4X front panel with tactile feedback push buttons. The buttons allow even the heaviest gloved hand to easily configure this controller. Large, bright LED's provide an easy-to-read interface at a distance.

Flexibility: Output cards are plug-in modules that are field replaceable. The switch-selectable control modes include On-Off or Proportional-Integral (PI).

Simple Sensor & Control Selection

Locate the input selection DIP switch on the bottom of the 2110 controller and simply select °F or °C. Thermocouple (TC) or RTD, the Thermocouple type (J or K), and PI (Proportional-Integral) or onof (on-off) control.

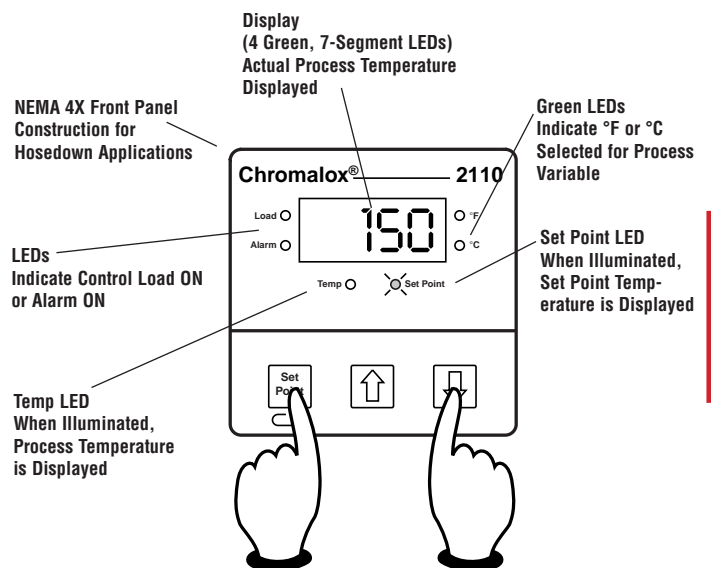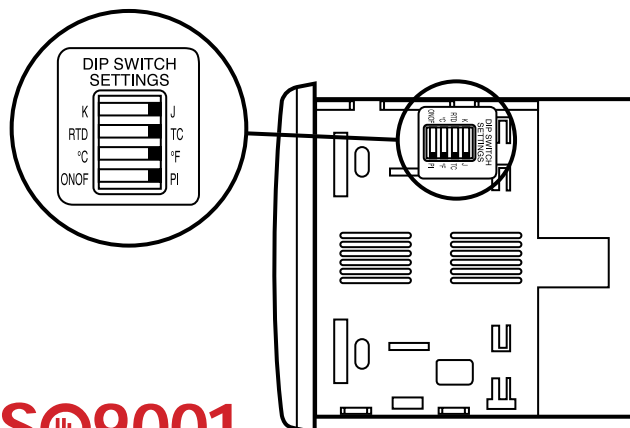


Single Channel
Controllers



2110 1/4 DIN Temperature Controller

Mounting Dimensions (Inches)

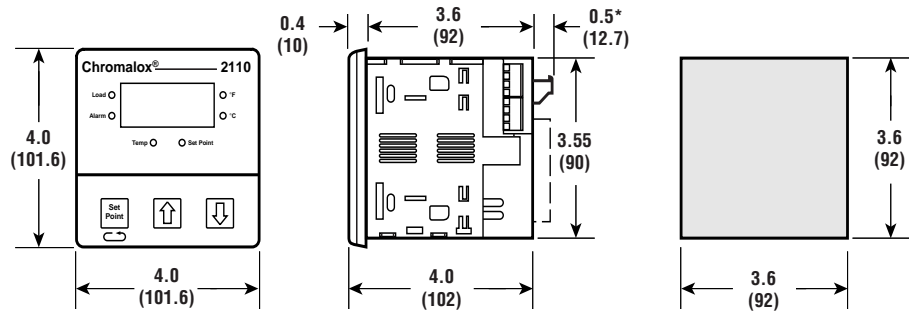

* With alarm option or S2 output

Specifications

Control Modes

ON/OFF
PI—Proportional with integral

Control Adjustments

Proportional Band Sensor range
Automatic Reset 0.0 to 99.9 repeats/minute
Cycle Time 0.1 to 60.0 seconds
On/Off Deadband 1 to 100°F
Set Point Upper Limit Sensor range
Set Point Lower Limit Sensor range
Output Limit 0 to 100%

Alarm Adjustments

Type Absolute High or Low
Set Point Sensor range
Alarm Dead Band 0 to 100°F

Control/Alarm Outputs

Relay (R1) 1 Amp Form A, 120/240 VAC
Relay (R3) 120/240 VAC resistive loads at 30 sec. cycle time
..... 20 Amps, 500,000 Operations

.....15 Amps, 1 Million Operations
.....10 Amps, 5 Million Operations
.....5 Amps, 5 Million Operations
Solid State Relay Drive(V0) 24 VDC at 40mA
Solid State Relay (S0)1A Triac
Solid State Relay (S1)5A, up to 240 VAC at 40°C
Solid State Relay (S2)10A, up to 240 VAC at 40°C
Alarm Form C, Relay 5 Amps at 120 VAC, 2.5A at 240 VAC

Sensor Input Switch selectable J, K Thermocouple or RTD

Input Update Rate Four samples per second

Input Specifications	Range°F	Range°C
J TC	-100 to 1,400°F	-73 to 760°C
K TC	-300 to 2,400°F	-184 to 1,316°C
100Ω Pt RTD (a=.00385)	-200 to 1,000°F	-128 to 538°C

Readout Stability

J and K TC +/-1°F per 10°F change in ambient temp.
RTD +/-0.5°F per 10°F change in ambient temp.

Open Sensor and Out-of-Range Conditions Displays "SEnS", Control output 0%

Instrument Power 100 to 240 VAC input +10%, -15%
Less than 10 VA
Operating Environment 0 to 65°C (32 to 150°F)

Enclosure Material ABS plastic rated for 0 to 175 °F

Front Panel NEMA 4X construction

Influence of Line Voltage Variation +/-0.1% of sensor span per 10% change in nominal line voltage

Accuracy at 77°F ambient
0.2%span ±1 LSD

Ordering Information

Complete the Model Number using the Matrix provided.

In Stock:

Model	PCN
2110 1/4 DIN CONTROLLER SINGLE OUTPUT	
2110-R1000 1AMP RELAY	317016
2110-R3000 20AMP RELAY	317024
2100-V0000, SSR DRIVE	317032
2100-S0000, 1AMP SSR	317040
2110-S1000, 5AMP SSR	317059
2110-S2000, 10AMP SSR	317067
DUAL OUTPUT	
2110-R1100, 1AMP RELAY ALARM	317075
2110-R3100, 20AMP RELAY ALARM	317083
2110-V0100 SSR DRIVE ALARM	317091
2110-S0100 1AMP SSR ALARM	317104
2110-S1100 5AMP SSR ALARM	317112
2110-S2100 10AMP SSR ALARM	317120

Model

2110 1/4 DIN Controller, with Selectable Thermocouple or RTD Inputs

Code Control Output

R1 Relay, 1 Amp Form A, 120/240Vac
R3 Relay, 20 Amp Form A, 120/240Vac
V0 Solid State Relay Drive, 24Vdc @ 40ma
S0 Solid State Relay, 1 Amp, up to 240 Vac
S1 Solid State Relay, 5 Amp, up to 240 Vac, at 40°C
S2 Solid State Relay, 10 Amp, up to 240 Vac, at 40°C

Code Alarm output (Kit Option)

0 No Alarm
1 Form "C" Relay, 5 Amp at 120 Vac, 2.5 Amps at 240 Vac

Code

0 Add to Complete Part Number

Code Power Supply

0 100-240Vac

2110 - R3 1 0 0 Typical Model Number