


FW

Food Warmer Radiant Heater



- 0.5 - 1.05 kW
- 120, 208 and 240 Volt
- 3/8" Dia. INCOLOY® Sheath Elements (type RTU)
- 1250°F Max. Sheath Temp.

Dimensions (Inches)

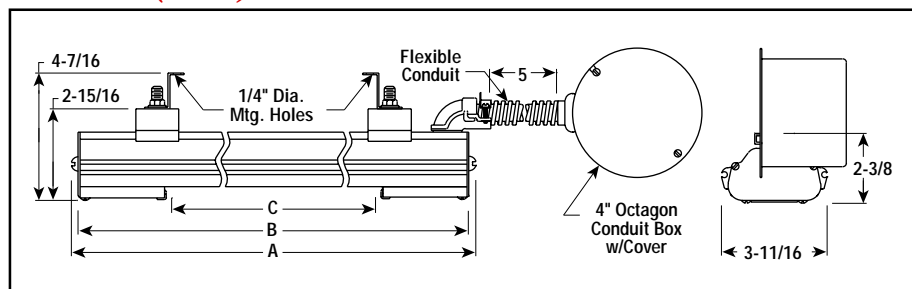

Applications

Use where cooked food is placed for pickup to maintain serving temperatures.

Features

Gentle Uniform Infrared Heat maintains heat in food.

Shatterproof — The all-metal heater is more resistant to accidental blows, steam and splashed liquids. Element is mounted on special porcelain blocks at the focus of parabolic extruded aluminum housing.

Easy Electrical Connection — All internal wiring is complete to 4 inch octagonal outlet box. Power connection should be made with 75°C wire.

Includes all Hardware Required for Face-Down Mounting — Clamps and brackets may be positioned anywhere along the length of the aluminum housing.

Spacing to All Surfaces (Inches)

Top	Sides	Ends	Face
1-1/2 min.	2	1/2 min.	24 min.

Accessories

Protective Grille — Optional snap-in sections help protect personnel from contact with hot elements.

Specifications and Ordering Information

kW	Volts	Dimensions (In.)			Model	Stock	PCN	Optional Grille	Replacement Elements ¹	Wt. (Lbs.)
		A	B	C						
0.75	120	30-5/8	30-1/4	22-3/4	FW-750	S	114024	(2) GR-800	RTU-3083AW1	6
0.75	208	30-5/8	30-1/4	22-3/4	FW-750	NS	114032	(2) GR-800	RTU-3083AVW	6
0.75	240	30-5/8	30-1/4	22-3/4	FW-750	NS	114040	(2) GR-800	RTU-3083AW	6
1.05	120	46-5/8	46-1/4	38-1/2	FW-1050	S	114059	(4) GR-800	RTU-4113AW1	6
1.05	208	46-5/8	46-1/4	38-1/2	FW-1050	NS	114067	(4) GR-800	RTU-4113AVW	6
1.05	240	46-5/8	46-1/4	38-1/2	FW-1050	NS	114075	(4) GR-800	RTU-4113AW2	6

Stock Status: S = stock AS = assembly stock NS = non-stock

To Order— Specify model, PCN, kW, volts, quantity, optional grille and replacement elements (if needed).

1. Refer to Tubular Heaters section.