Components


UTUA-LT

430" Dia. Round Cross- Section

- INCOLOY Sheath
- 2000 and 4500 Watts 240 and 480 Volt
- 9/16 18 Bulkhead Fittings
- Replacement Element for Aitken* OH, SH, PPH and PHX Radiant Heaters



Replacement Elements - Dimensions (Inches)

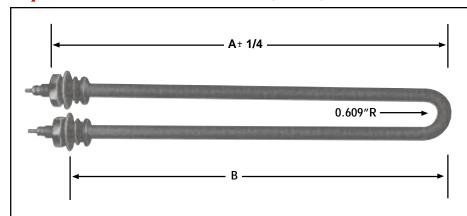

Applications

Replaces heating elements in radiant comfort heaters manufactured by Aitken Products, Inc. it can also be used in other heating applications where threaded liquid-tight fittings permit mounting for high-velocity air or immersion heating of liquids which are not corrosive to INCOLOY. When used for immersion heating, heated section of element must be immersed at all times.

Advantages

Specially constructed to provide excellent service life in radiant heating applications.

Features

Liquid-Tight Fittings - 9/16-18 Brass for mounting. Nuts, washers and gaskets included.

10-32 Terminals - Stainless steel, complete with nuts and washers.

Work Temperatures - See Tubular Heater overview section for element rated 40 W/In²

Bending - Lengthwise only. See Tubular Heater Overview Section.

Specifications and Ordering Information

40 W/In ²	Dimensions (I		sions (In)					Wt.
Watts	Volts	Α	В	Model	Aitken* Part No.	Stock	PCN	(Lbs)
2000	240	21.5	20.5	UTUA-224LT	HE20240	S	106016	2
2000	480	21.5	20.5	UTUA-248LT	HE20480	S	106024	2
4500 4500	240 480	43 43	42 42	UTUA-424LT UTUA-448LT	HE45240 HE45480	S S	106032 106040	3 3

Stock Staus: S = stock AS = assembly stock NS = non-stock **To order** - Specify model, PCN, watts, volts and quantity

Represented By: Ross & Pethtel Phone: 225-273-2202 Website

^{*}Aitken is a registered trademark of Aitken Products, Inc.