

FR & DQ Metaray® Heaters

- 375 - 500 Watt Lamp Replacement
- 1,000 Watt Ceramic Replacement
- 120 Volt

Applications

- Spot Heating
- Asphalt and Vinyl Tile Glue Softening
- Thawing
- Touch-Up Paint Curing

Features

More Durable Heat Source for existing infrared lamp ovens. Glassless, glareless, breakproof.

Impervious to Splashed Paint or other liquids.

Uniform Work Coverage, higher wattages and easy controllability deliver better results from the same sockets.

Chromalox® Alloy Tubular Elements with long cold terminal ends and medium screw base are utilized in Metarays®.


Type DQ provides non-splintering replacement for hollow cylinder ceramic radiant heaters; delivers a flatter "stripeless" radiant heat pattern. Can be spaced closer to work.

Type FR replaces G-30 lamps. Type FRR replaces R-40 lamps.


Type FR and FRR have secondary insulation and centering index ring for double wall ovens.



DQ — Dimensions (Inches)

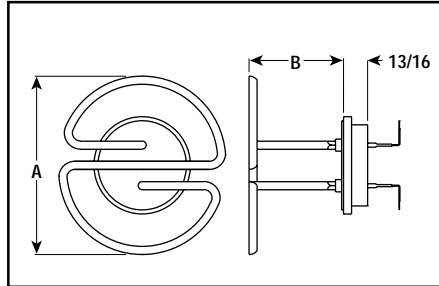

FR & FRR — Dimensions (Inches)

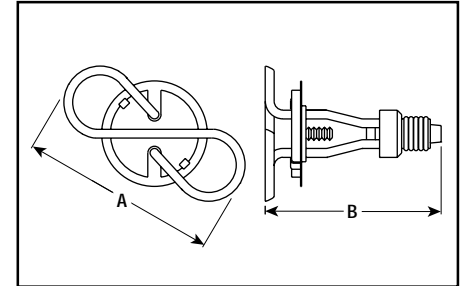

Specifications and Ordering Information

Replacement Lamps	Watts/120V	Dimensions (In.)		Model	Stock	PCN	Wt. (Lbs.)
		A	B				
FR — Medium Screw Base — for Equipment with Built-in Reflectors							
G-30	375	5-5/8	5	FR-38	S	111940	1.5
G-30	500	5-5/8	5	FR-385	S	111958	1.5
G-30	500	6-3/4	5-9/32	FR-50	S	111966	1.5
FRR — Medium Screw Base — for Double-Wall Ovens							
R-40	375	5-5/8	7-3/8	FRR-37	NS	111974	2
DQ — Medium Bi-Post Base — to Replace Cylindrical Ceramic Heaters							
—	1,000	5-1/2	2-11/16	DQ-100	S	113814	1.5
Stock Status: S = stock AS = assembly stock NS = non-stock To Order— Specify model, PCN, watts, volts, quantity and grille (if needed). 1. Protective grille, optional. Specify GR-50 (PCN 111931).							

Metal Sheath Radiant

Grille — Dimensions (Inches)

